



TX433-JKD-20 Product Data Sheet v1.0



Product Introduction**TX433-JKD-20**

TX433-JKD-20 is a 433MHz bendable rubber antenna. Height of the antenna is 200mm. With a SMA-J interface (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WiFi, mobile terminal devices with frequency of 433MHz as router, AP, radio, aircard, smart TV and so on.

Other Parameters**TX433-JKD-20**

No.	Parameter item	Parameter details & Description
1	Height	200mm
2	Total Weight	21g
3	Coat Material	TPEE
4	Interface	SMA-J (SMA inner screw thread and inner needle)
5	Working Temperature	-40℃ ~ +85℃
6	Storage Temperature	-40℃ ~ +85℃

Physical Parameters**TX433-JKD-20**

No.	Parameter item	Parameter details & Description
1	Frequency	433MHz
2	Bandwidth	400-470MHz
3	Gain	3dBi
4	SWR	≤1.5
5	Polarization	Vertical
6	Radiation Direction	Omnidirectional
7	Input Impedance	50 Ω
8	Power Capacity	20W

Size


TX433-JKD-20




Testing

TX433-JKD-20

1、VSWR

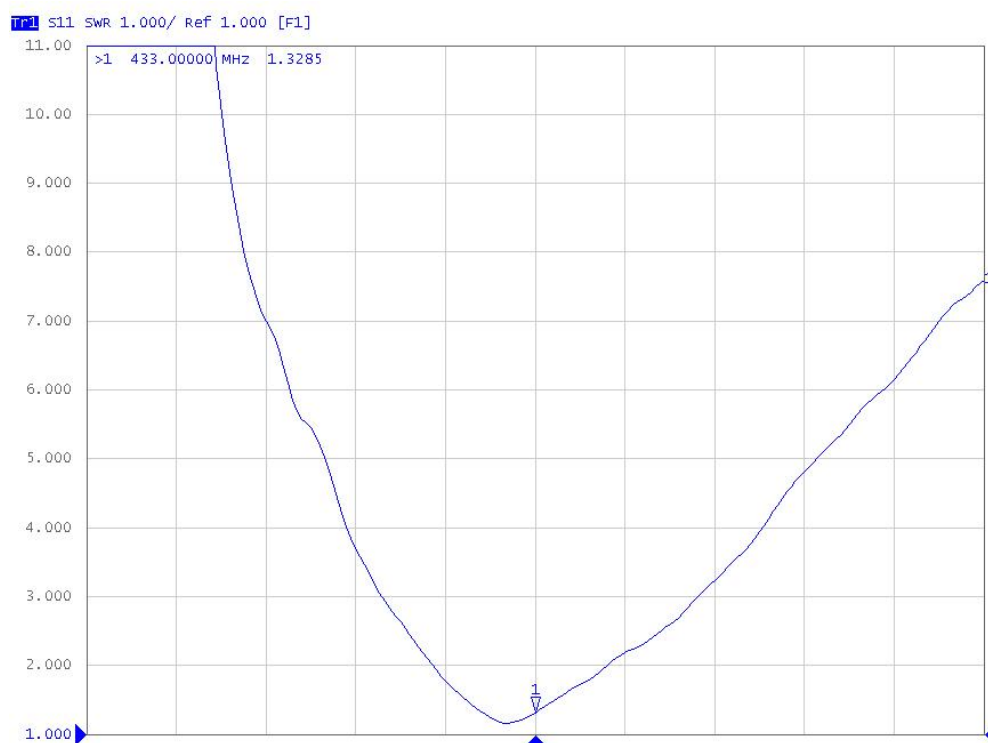

2、Smith

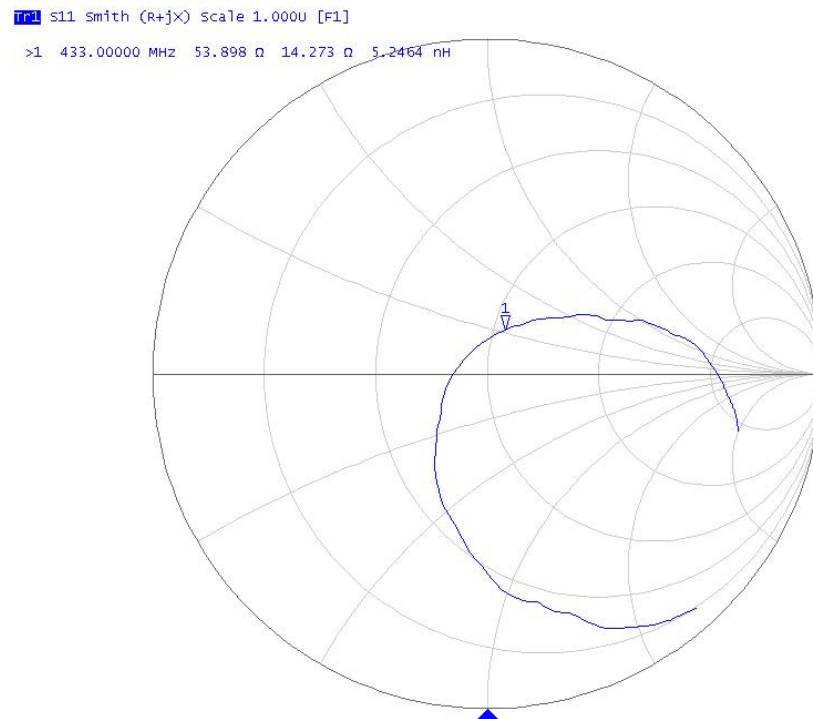

FAQ

TX433-JKD-20

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions:

lirong@cdebyte.com

Phone: 028-61543675

Web: www.cdebyte.com

Address: Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu,
611731, Sichuan, China



Chengdu Ebyte Electronic Technology Co.,Ltd.